

60CH Tandem Axle Car Hauler

G.V.W.R.	6,000#	Axle	(2) 3,500# EZ Lube w/ (1) Elec. Brake
G.A.W.R. (Ea. Axle)	3,500#	Supension	Multi-Leaf Spring w/ Equalizer
Coupler	2" A-Frame	Tire	ST205/75R-15 Load Range C
Safety Chains	1/4" Grd. 30 w/Safety Latch Hook (2 ea)	Wheel	15" x 5"; White Spoke 5 on 5 Bolt Pattern
Jack	2,000# Top Wind (Bolted On)	Floor	2" Treated Pine or Douglas Fir*
Tongue	4" Channel	Lights	D.O.T. Stop, Tail, Turn & Clearance
Top Rail	None	Elec. Plug	7-Way RV
Frame	5" x 3" x 1/4" Angle	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Crossmembers	3" x 2" x 3/16" Angle		
Uprights	None	Finish	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
Fenders	9" x 72" Rolled Formed w/Back (Bolted On)		


* Douglas Fir Available from Caldwell, ID Facility Only

Standard Features

- Tie Down Pockets on Front & Side
- EZ Lube Hubs
- Dexter Brand Axles
- Nev-R-Adjust Electric Brakes
- Cambered Axles
- Grommet Mount Sealed Lighting
- Protected Wiring
- Removable Sand Foot on Jack
- Complete Break-A-Way System w/Charger
- Removable Fenders
- Radial Tires **NEW!**

Description

Dimensions			
Length	A	B	C
14'	169-1/2"	103"	66-1/2"
16'	193-1/2"	115"	78-1/2"

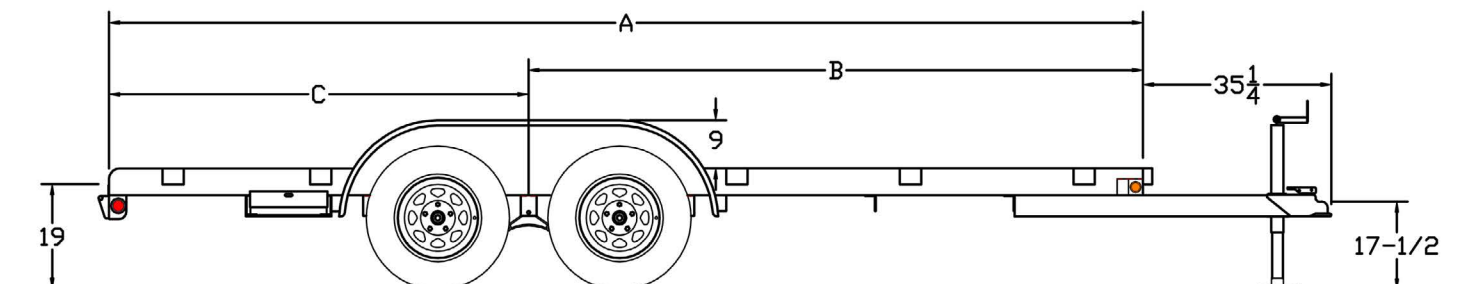

60CH Tandem Axle Car Hauler ●



Shown with optional slide-in ramps and spare tire mount

◆ Model	Weight*	Description
60CH-14	1,430#	83" x 14' Economy Tandem Axle Car Hauler
60CH-16	1,460#	83" x 16' Economy Tandem Axle Car Hauler

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
COUPLERS	2-5/16" Stamped Coupler
BRAKES	Electric Brakes on 2nd Axle
TIRE/WHEEL	Spare Tire Mount (Side)
TIRE/WHEEL	Spare Tire (ST205/75R-15 LR-C)
RAMPS	4' Slide-In Angle Ramps

Economy Model- No Additional Options Available